PREXOS

HIGH EFFICIENCY BI-FACIAL GLASS TO TRANSPARENT BACKSHEET PV MODULES

Mono PERC ● N-TYPE ○ HJT ○

MODEL:
PREXOS VSMDHT.66.AAA.05

655-680W

SUBSTRATE	FRAME TYPE	FRAME VARIANT
TRANSPARENT BACKSHEET ○	**ALUMINIUM ●**	**SILVER ●**
MESH BACKSHEET ●	STEEL ○	BLACK ○

MAXIMUM EFFICIENCY %	CELL TYPE	PRODUCT WARRANTY	PERFORMANCE WARRANTY
21.89	G12 **HALF CUT**	12 YEARS	27 YEARS

0% NEGATIVE POWER TOLERANCE

- Positive power tolerance of upto 0 ~ 4.99Wp
- Module current binning radically reduces string mismatch losses

LOWER LCOE

- Lower balance of systems cost
- Improves value proposition of the product with competitive ROI

HIGHLY AUTOMATED PRODUCTION LINE

- Multi stage EL and digitalised visual inspection results lower defect rates
- Implemented engineering excellence ensure top notch quality

PROLONGED SAFETY ASSURANCE

- IP68 with potting JB provides higher level of water ingress protection
- High Insulation resistance for ensuring electrical safety

RELIABILITY IS IMPROVED

- Higher corrosion resistance to severe conditions of sand dust, concentrated ammonia and salt mist
- Low risk of module warping & micro cracking

PRODUCT CERTIFICATES

SYSTEM CERTIFICATES^

IEC 61215 : 2021, IEC 61730, UL 61215, UL 61730, IS 14286, IS/IEC 61730, IEC 61701, IEC 62716, IEC 60068-2-68, CAN-CSA

INTERNATIONAL ORGANIZATION FOR STANDARDIZATION:

- ISO 9001:2015/ Quality Management System
- ISO 14001:2015/ Environmental Management System
- ISO 45001:2018/ Occupational Health and Safety Management System
- SA 8000 :2014/ Social Accountability International

vikramsolar
CREATING CLIMATE FOR CHANGE

Monocrystalline Solar PV Modules, Bifacial, GTB, G12 MonoPerc

vikramsolar
CREATING CLIMATE FOR CHANGE

Mono PERC N-TYPE HJT

TECHNICAL DATA
PREXOS 655-680W

THIS DATASHEET IS APPLICABLE FOR: **PREXOS VSMDHT.66.AAA.05 (AAA=655-680)**

ELECTRICAL PARAMETERS | STC[1,2]

Peak Power P_{max} (Wp)	655	660	665	670	675	680
Maximum Voltage V_{mpp} (V)	38.3	38.5	38.7	38.9	39.1	39.3
Maximum Current I_{mpp} (A)	17.12	17.16	17.20	17.22	17.27	17.31
Open Circuit Voltage V_{oc} (V)	45.9	46.1	46.3	46.5	46.7	46.9
Short Circuit Current I_{sc} (A)	17.93	17.99	18.05	18.11	18.17	18.23
Module Efficiency (%)	21.09	21.25	21.41	21.57	21.73	21.89

1)STC:1000 W/M² IRRADIANCE, 25°C CELL TEMPERATURE, AM1.5G SPECTRUM ACCORDING TO EN 60904-3 | 2) TOLERANCE OF RATING AT STC (P_{MPP} / I_{SC} / V_{OC}) [%] : 0-3/±5/±5 | ELECTRICAL MEASUREMENT UNCERTAINTY IS WITHIN ± 2%

ELECTRICAL PARAMETERS | NOCT[3]

Peak Power P_{max} (Wp)	489.4	492.4	496.8	499.3	503.5	507.2
Maximum Voltage V_{mpp} (V)	35.6	35.7	35.9	36.0	36.2	36.3
Maximum Current I_{mpp} (A)	13.75	13.79	13.84	13.88	13.93	13.97
Open Circuit Voltage V_{oc} (V)	42.7	42.9	43.1	43.3	43.5	43.6
Short Circuit Current I_{sc} (A)	14.48	14.53	14.58	14.63	14.68	14.73

3)NOCT IRRADIANCE 800 W/M², AMBIENT TEMPERATURE 20°C, WIND SPEED 1 M/SEC

ELECTRICAL PARAMETERS | BNPI[4,5]

Peak Power P_{max} (Wp)	716.9	722.4	727.8	733.3	738.8	744.3
Maximum Voltage V_{mpp} (V)	38.3	38.5	38.7	38.9	39.1	39.3
Maximum Current I_{mpp} (A)	18.74	18.78	18.83	18.85	18.90	18.95
Open Circuit Voltage V_{oc} (V)	45.9	46.1	46.3	46.5	46.7	46.9
Short Circuit Current I_{sc} (A)	19.62	19.69	19.76	19.82	19.89	19.95

4) BNPI: 1000W/M²+ϕ.135, BIFACILITY COEFF. (ϕ) AT BNPI P_{MAX}, I_{SC} IS 70±10% & FOR V_{OC} IS 99±10% , AM 1.5, 25°C | 5) TOLERANCE OF RATING AT BNPI (P_{MPP}/ I_{SC}/ V_{OC}) [%] : 0-3/±5/±5

TEMPERATURE COEFFICIENTS (Tc) PERMISSIBLE OPERATING CONDITIONS

Tc of Open Circuit Voltage (β)	-0.27%/°C
Tc of Short Circuit Current (α)	0.050%/°C
Tc of Power (γ)	-0.35%/°C
Maximum System Voltage	1500V
NOCT	45°C ± 2°C
Temperature Range	-40°C to + 85°C

MECHANICAL DATA

Length × Width × Height	2384 X 1303 X 35 mm (93.86 x 51.30 x 1.38 inches)
Weight	33.6 Kg (74.08 lbs)
Junction Box	IP 68, Split Junction Box with individual bypass diodes
Cable & Connectors#	200 mm (+ve terminal) and 300 mm (-ve terminal) length cables,MC4 Compatible/MC4 Connectors
Application Class	Class A (Safety class II)
Superstrate##	3.2 mm (0.125 inches) high transmission ARC tempered glass (low iron content)
Cells	66 Mono PERC (132 half-cells) P-Type bifacial solar cells
Substrate	High transmittance composite film with white/black mesh
Frame	Anodized aluminium/ Alloy steel frame#*
Mechanical Load Test	5400 Pa (Snow load), 2400 Pa (Wind load)
Cell Encapsulant	EPE/ EVA
Maximum Series Fuse Rating	30 A
Hail Test	Ø 45mm | Impact Velocity up to 27m/s

WARRANTY

Product Warranty**	12 years
Performance Warranty**	Linear Power Warranty for 27 years with 2% for 1st year degradation and 0.55% from year 2 to year 27

DIMENSIONS IN MM

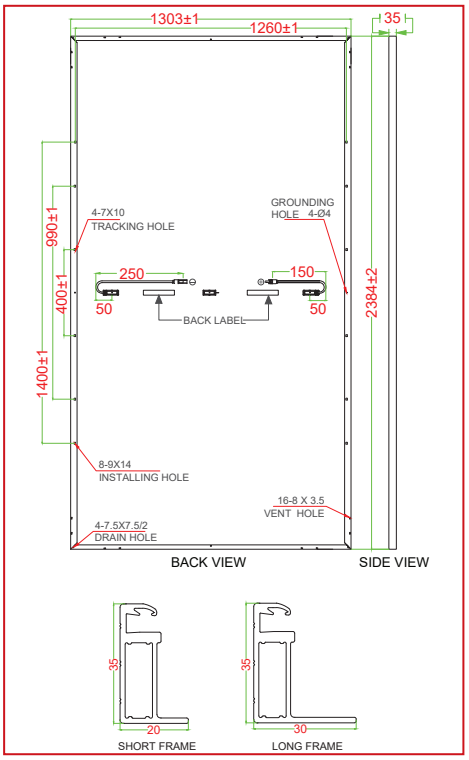

TYPICAL I-V CURVES[7]

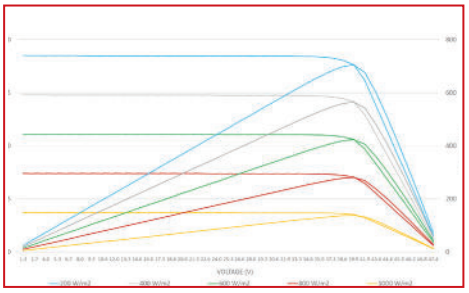

7) AVERAGE RELATIVE EFFICIENCY REDUCTION OF 5% AT 200 W/M² ACCORDING TO EN 60904-1

PERFORMANCE WARRANTY

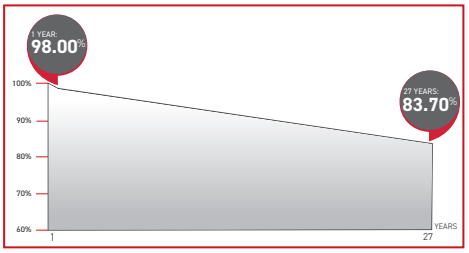

PACKAGING INFORMATION

Quantity /Pallet	31
Pallets/Container (40'HC)	17
Quantity/Container (40'HC)	527

^All (^) certifications under progress. | **Refer to Vikram Solar's warranty document for terms and conditions. | #400mm(15.75 inches), 1000mm(39.37 inches),1200mm (47.24 inches) cable lengths are also available | ##Anti-glare Glass is also available | *As per applicable product | #*With additional Cost & Lead Time subject to availability | STC : Standard Testing Condition | BNPI : Bifacial Nameplate Irradiance | NOCT : Nominal Operating Cell Temperature

CAUTION: READ SAFETY AND INSTALLATION MANUAL BEFORE USING THE PRODUCT.
Specifications included in this datasheet are subject to change without notice. Electrical data without guarantee. Please confirm your exact requirement with the company representative while placing your order.
Vikram Solar and all its accompanying logos are trademarks of Vikram Solar Limited registered in India.