

LG NeON[®]H

The LG NeON[®]H is one of the most powerful and versatile modules on the market today. The LG NeON[®]H is equipped with N-type cells and half-cut technology to increase power and efficiency. The LG NeON[®]H includes a 25-year product and 90.6% performance warranty for higher performance and reliability.

455W | 450W
445W | 440W

FEATURES

90.6%
in year 25

Enhanced Performance Warranty

LG NeON[®]H comes with an enhanced performance warranty. After 25 years of use, the LG NeON[®]H is guaranteed to provide at least 90.6% of initial performance.

25
YEARS
WARRANTY

Industry-Leading Product Warranty


LG offers an industry-leading 25 year product warranty on the NeON[®]H.



Reliable Quality

LG NeON[®]H offers reliable and proven quality through rigorous testing*.


* LG is subject to rigorous quality verification through PVEL PQP test. The PVEL PQP includes test sequences examining both the reliability and performance characteristics of PV modules.



144_{cell}

About LG Electronics

LG is transforming today's solar landscape, offering high-efficiency solar panels for customers who demand high performance, reliability and consistently strong energy yield from a brand they can trust. LG's modules feature high power outputs, outstanding durability, appealing aesthetics and high-efficiency technology.

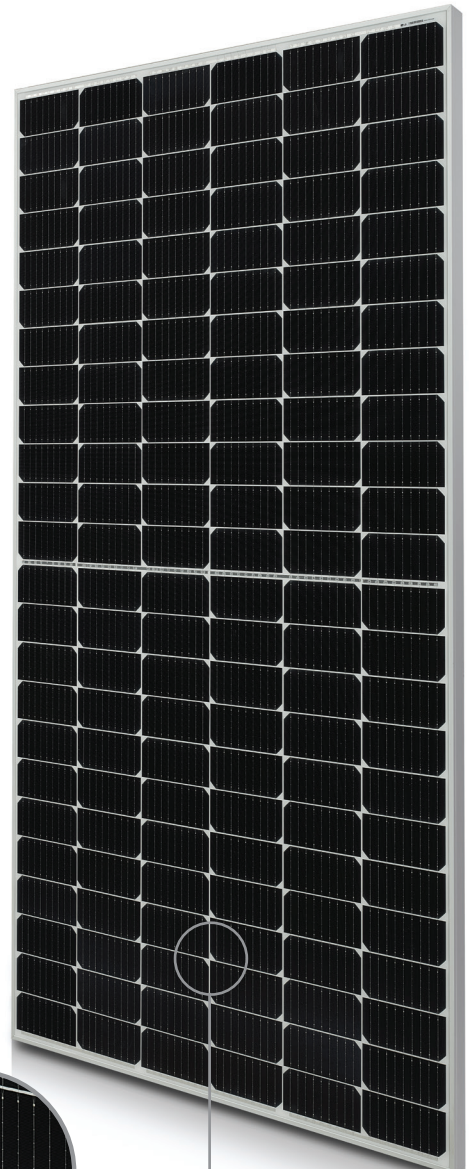

General Data

Cell Properties (Material / Type)	Monocrystalline / N-type
Cell Maker	LG
Cell Configuration	144 Cells (6 x 24)
Number of Busbars	9 EA
Module Dimensions (L x W x H)	2,110 x 1,042 x 40 mm
Weight	22 kg
Glass (Material)	Tempered Glass with AR coating
Backsheet (Color)	White
Frame (Material)	Anodized Aluminium
Junction Box (Protection Degree)	IP 68 with 3 Bypass Diodes
Cables (Length)	1,400 mm x 2 EA
Connector (Type / Maker)	MC4 / Stäubli

Certifications and Warranty

Certifications	IEC 61215-1 / -1-1 / 2:2016, IEC 61730-1 / 2:2016, UL 61730-1:2017, UL 61730-2:2017
	ISO 9001, ISO 14001
	OHSAS 18001
Salt Mist Corrosion Test	IEC 61701 : 2011 Severity 6
Ammonia Corrosion Test	IEC 62716 : 2013
Module Fire Performance	Type 1 (UL 61730)
Fire Rating	Class C (UL 790)
Solar Module Product Warranty	25 Years
Solar Module Output Warranty	Linear Warranty*

* 1) First years : 98.5%, 2) After 1st year : -0.33% / year, 3) 90.6% for 25 years

Temperature Characteristics


NMOT*	[°C]	42 ± 3
Pmax	[%/°C]	-0.33
Voc	[%/°C]	-0.26
Isc	[%/°C]	0.04

* NMOT (Nominal Module Operating Temperature)
: Irradiance 800W/m², Ambient temperature 20°C, Wind speed 1m/s, Spectrum AM 1.5

Electrical Properties (NMOT)

Model	LG455N2W-E6	LG450N2W-E6	LG445N2W-E6	LG440N2W-E6
Maximum Power (Pmax) [W]	344	341	336	332
MPP Voltage (Vmpp) [V]	39.60	39.40	39.10	38.80
MPP Current (Impp) [A]	8.68	8.64	8.60	8.57
Open Circuit Voltage (Voc) [V]	47.10	46.90	46.60	46.30
Short Circuit Current (Isc) [A]	9.17	9.13	9.08	9.02

I-V Curves

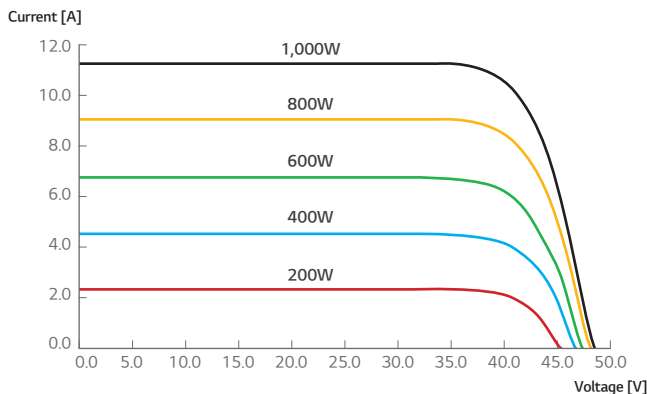

Electrical Properties (STC*)

Model	LG455N2W-E6	LG450N2W-E6	LG445N2W-E6	LG440N2W-E6
Maximum Power (Pmax) [W]	455	450	445	440
MPP Voltage (Vmpp) [V]	42.1	41.8	41.5	41.2
MPP Current (Impp) [A]	10.83	10.79	10.74	10.70
Open Circuit Voltage (Voc, ± 5%) [V]	49.9	49.7	49.4	49.1
Short Circuit Current (Isc, ± 5%) [A]	11.39	11.34	11.27	11.20
Module Efficiency [%]	20.7	20.5	20.2	20.0
Power Tolerance [%]	0 ~ +3			

* STC (Standard Test Condition)
: Irradiance 1,000W/m², Cell temperature 25°C, AM 1.5, Measure Tolerance of Pmax : ± 3 %

Operating Conditions

Operating Temperature	[°C]	-40 ~ +85
Maximum System Voltage	[V]	1,000(IEC) / 1,500(UL)
Maximum Series Fuse Rating	[A]	20
Mechanical Test Load* (Front)	[Pa]	5,400
Mechanical Test Load* (Rear)	[Pa]	3,000

* Based on IEC 61215-2 : 2016 (Test Load = Design Load x Safety Factor(1.5))

Packaging Configuration

Number of Modules Per Pallet	[EA]	25
Number of Modules Per 40ft HQ Container	[EA]	500
Packaging Box Dimensions (L x W x H)	[mm]	2,160 x 1,120 x 1,213
Packaging Box Gross Weight	[kg]	588

Dimensions (mm/inch)

